

Attn.: Tracy

Email Address: sales20@bakovisionled.com

Whatsapp/Mobile Number: +86 15367558232

### BT Series

Taxi Top Advertising Display,  
Digital Moving Billboard.  
3G, 4G, WIFI, GPS Transmission

Outdoor Waterproof  
High Brightness, Wide Viewing Angle  
Digital Moving Text, Graphics, Commercial Ads  
Light Weight  
Single or Double Sided  
3G, 4G, WIFI, GPS Transmission  
Front Access




### IP65 High Protection

- › Waterproof and dustproof
- › For all weather conditions

### Multiple Communication Methods

- › 3G, 4G, WIFI, GPS, USB, cable transmission

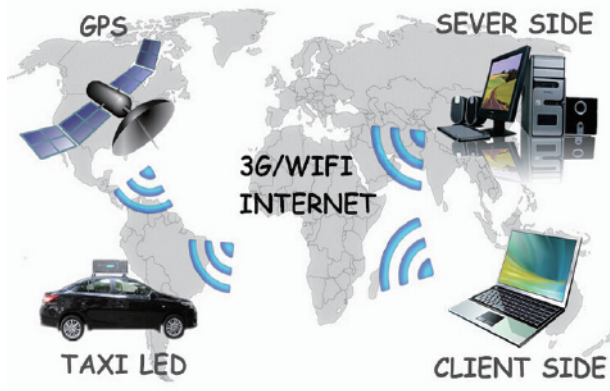

### High Brightness

- › 3500-7000 nits brightness
- › High bright SMD
- › High efficiency PSU



### Built-in Delay Protector

- › The Built-in delay protector prevents the screen from over-temperature, over-current, over-voltage impacting when the car starts.

## BT / Specifications

	BT-2	BT-3	BT-5
Physical Pitch	2.5 mm	3 mm	5 mm
Pixel Configuration	SMD 2121	SMD 2121	SMD 2727
Pixel Density	160,000 pixels/m <sup>2</sup>	111,111 pixels/m <sup>2</sup>	40,000 pixels/m <sup>2</sup>
Module Dimensions (W × H) (mm)	160 × 160	192 × 196	160 × 160
Screen Size (mm)	960 × 320	768 × 288	960 × 320
Screen Resolution	384 × 128	256 × 96	192 × 64
Physical Resolution of Module (W × H)	64 × 64	64 × 32	32 × 32
Frame size (mm)	1,100 (L) × 410 (H) 164 (bottom) / 99 (top)	820 (L) × 390 (H) 170(bottom) / 99 (top)	1,100 (L) × 410 (H) 164 (bottom) / 99 (top)
Panel Material	Aluminum	Aluminum	Aluminum
Screen Weight	26 kg	15 kg	23 kg
Gray Scale	16 bit	16 bit	16 bit
Colours	281 trillion	281 trillion	281 trillion
Contrast Ratio	4,000 : 1	4,000 : 1	2,000 : 1
Average Power Consumption	180 W/Set	80 W/Set	150 W/Set
Max Power Consumption	480 W/set	250 W/Set	450 W/Set
Operating Temp/Humidity	-40 C - 75 C / 10% - 90%	-40 C - 75 C / 10% - 90%	-40 C - 75 C / 10% - 90%
Storage Temp/Humidity	-30 C - 60 C / 10% - 60%	-30 C - 60 C / 10% - 60%	-30 C - 60 C / 10% - 60%
Refresh Rate	>1,920 Hz	>1,920 Hz	>1,920 Hz
Brightness	5,000nits	3,500nits	5,500nits
Scan Method	1/16 Scan	1/16 Scan	1/8 Scan
Horizontal Viewing Angle	160°	160°	160°
Vertical Viewing Angle	140°	140°	140°
Expected Lifetime	100,000 Hrs	100,000 Hrs	100,000 Hrs
Servicing	Back	Back	Back
IP Rating	IP 65	IP 65	IP 65

## Typical Applications:

- Taxi, Bus
- Car Show
- Fashion Store
- DOOH
- Advertising
- Reception Hall
- Opera House
- Wedding Hall
- Stadium
- Shopping Mall
- DJ Touring
- Theme Resort